



01495-09-04057  
05295-16-04057  
06556-19-04057



LINHA ÓPTICA

Member of CISQ Federation





CERTIFIED MANAGEMENT SYSTEM  
ISO 9001



# CAIXA DE EMENDA ÓPTICA - CEO COM FECHAMENTO TERMOCONTRÁTIL (CEO-QT)

- Compacta
- Alto grau de segurança
- Fácil Instalação e acesso
- Versátil, aplicável em redes aéreas e subterrâneas

Dimensões (mm):

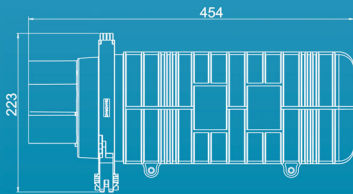

Versão QT-8

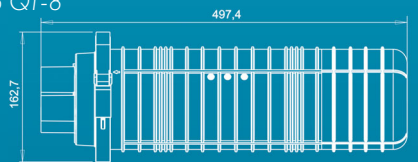

Também disponível em cores:



Versão QT-8

## CARACTERÍSTICAS:

**Abriga e protege as emendas de fibras ópticas de esforços mecânicos e de agentes agressores externos.**

**Fabricada com materiais resistentes à corrosão, envelhecimento e proteção contra os raios ultravioleta.**

**Grau de proteção de vedação IP68.**

6 ou 10 ACESSOS PARA CABOS

Através de uma entrada oval, que possibilita a sangria de cabos e mais quatro derivações (cabos de 6 a 19mm) ou oito derivações (cabos de 6 a 11 mm) na versão QT-8.

ATÉ 144 EMENDAS ÓPTICAS

Comporta até 6 bandejas com capacidade para 24 emendas termicas (fusão) ou 12 emendas mecânicas.

RESERVA DE LOOSE

Comporta sobra de tubos loose com acesso seguro e facilitado.

TODOS OS AMBIENTES

Caixa hermética, que oferece proteção plena até nos ambientes mais agressivos. Indicada para uso em ambientes interno e externo aéreo e subterrâneo.

TIPOS DE FIXAÇÃO

Poste, cordoalha, fachada e caixas subterrâneas.

Quadrac Telecomunicações

Rua Ana Guimarães, 70 - Rocha - Rio de Janeiro | RJ - CEP: 20.960-040

Contato Comercial: (21) 3297-9450


vendas@quadrac.com.br



Manual



Especificação



Quadrac

www.quadrac.com.br



01495-09-04057  
05295-16-04057  
06556-19-04057



OPTIC LINE

Member of CISQ Federation



CERTIFIED MANAGEMENT SYSTEM  
ISO 9001

# FIBER OPTICAL SPLICE CLOSURE - CEO THERMOCONTRACTIVE CLOSURE (CEO-QT)



- Compact
- High degree of safety
- Easy installation and access
- Versatile, applicable in aerial and underground networks




QT-8 version


Also available in colors:



Dimensions (mm):

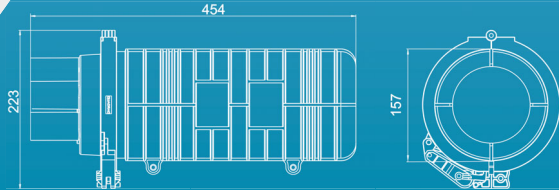

QT-8 version

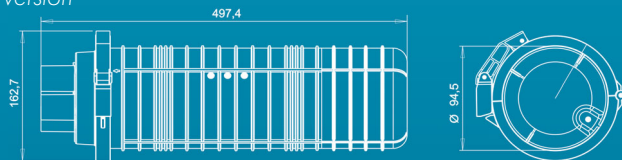

## CHARACTERISTICS:

6 OR 10 ACCESSES FOR CABLES

Through an oval entry, which allows the cable to be drained and four more leads (cables from 6 to 19mm) or eight leads (cables from 6 to 11 mm) in the QT-8 version.

UP TO 144 OPTICAL SPLICES

enables up to 6 trays with capacity for 24 thermal splices (fusion) or 12 mechanical splices.

LOOSE RESERVE

It has loose leftover tubes with safe and easy access.

ALL THE ENVIRONMENTS

Hermetic enclosure, which offers full protection even in the most aggressive environments. Indicated for use in internal and external aerial and underground


TYPES OF FIXATION

Pole-mounted, string-mounted and wall-mounted and underground boxes.

**It shelters and protects the splices of the optical fibers of mechanical stresses and external aggressors.**

**Made from materials resistant to corrosion, aging and protection from ultraviolet rays.**

**Degree of seal protection IP68.**



Quadrac

[www.quadrac.com.br](http://www.quadrac.com.br)



Manual



Specification

Quadrac Telecommunications

70, Ana Guimarães street - Rocha - Rio de Janeiro - RJ  
Brazil - Zip code: 20.960-040

Business contact: [vendas@quadrac.com.br](mailto:vendas@quadrac.com.br)  
+55 (21) 3297-9450